



Operator's Manual


16 Gauge Finish Nailer

Model No. NF6516

Item No. 65315

Drives Finish Nails

1" to 2-1/2" / 25mm to 65mm

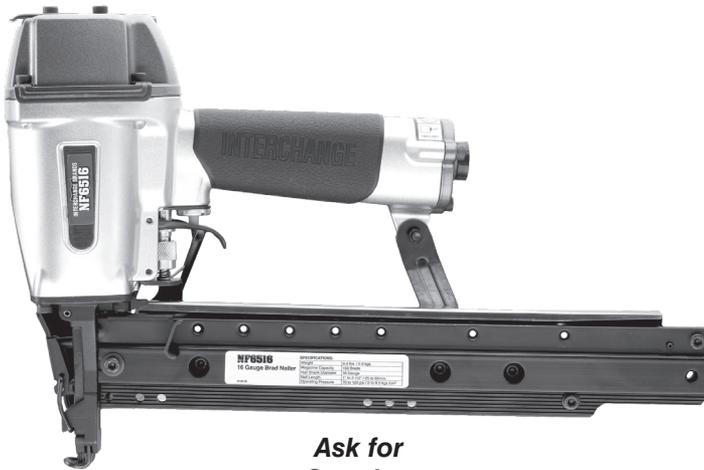

Ask for
Genuine
INTERCHANGE®
PB16 Finish Nails

NOTE: Please read and fully understand the instructions in this manual before operating the pneumatic power tool. Carefully read through this OPERATOR'S MANUAL to ensure efficient, safe operation. It is recommended that the MANUAL be kept readily available as an important reference when using this tool.

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Index

Information	Page
Important Information	3
Tool Information	
Nailer Specifications	4
Applications	4
Nail Specifications	4
Parts Identification	5
Accessories	5
Safety Information	
Safety Instructions	6-9
Employer's Responsibilities	9
Operating the Nailer	
Air Supply, Connections & Operating Pressure	10-11
Lubrication	11
Testing the Nailer	12-13
Operating Instructions	14
Nail Loading/Testing Instructions	14
Methods of Operation	14-15
Troubleshooting	15
Maintenance and Inspection	15-16
Parts Drawing/Schematics, Parts List, Parts Kits	
Parts Drawing/Schematics	17
Parts List	18
Parts Kits	19
Warranty	Back Cover

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Important Information

WARNING: The warnings, cautions and instructions discussed in this instruction manual can not cover all possible conditions and situations that may occur. It must be understood by the operator that common sense and caution are factors which can not be built into this product, but must be supplied by the operator.



When using the tool, basic safety precautions should always be followed to reduce the risk of personal injury and damage to equipment.

Read and understand tool labels and operating instructions, safety precautions and warnings in this manual before operating or maintaining this nailer.

Failure to follow warnings could result in **DEATH** or **SERIOUS INJURY**.

Most accidents that result from the operation and maintenance of nailers are caused by the failure to observe basic safety rules or precautions. An accident can often be avoided by recognizing a potentially hazardous situation before it occurs and by observing appropriate safety procedures.

Basic safety precautions are outlined in the "**SAFETY**" section of this Manual and in the sections which contain the operation and maintenance instructions.

Hazards that must be avoided to prevent bodily injury or tool damage are identified as **DANGERS** or **WARNINGS** on the nailer and in this Manual.

Never allow the nailer to be operated by children or individuals who have not reviewed this manual.

OPERATE THE NAILER ACCORDING TO THIS MANUAL.



WARNING!

- Always follow the tool manufacturer's safety and maintenance instructions.
- Always wear safety glasses with side shields when operating or servicing tools.
- Always disconnect the air supply from the tool and empty the magazine when servicing tools.

**SAVE THIS MANUAL
FOR FUTURE REFERENCE!**

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Tool Information

Nailer Specifications: NF6516 16 Ga. Finish Nailer

Tool Dimensions - Length x Height x Width	14-21/32" x 10" x 3" (372mm x 254mm x 76mm)
Weight	4.40 lbs. (2.0 kgs.)
Magazine Capacity	150 Finish Nails
Recommended Operating Pressure	70 to 100 psi / 5 to 7 kgs.
Maximum Operating Pressure	120 psi / 8.5 kgs.

Applications

Frame Assembly, Door and Window Construction, Exterior Trim, Stair Cases and Cabinet Building.


Nail Specifications

WARNING: Be sure to use only the genuine nails recommended for the NF6516. The use of any other nails can result in tool malfunction leading to serious injuries. Only the nail sizes shown in the table below can be driven with this nailer.

FASTENERS:

Nail Length	1" to 2-1/2" / 25mm to 65mm
Shank Diameter	16 gauge

DIMENSIONS OF FINISH NAILS:

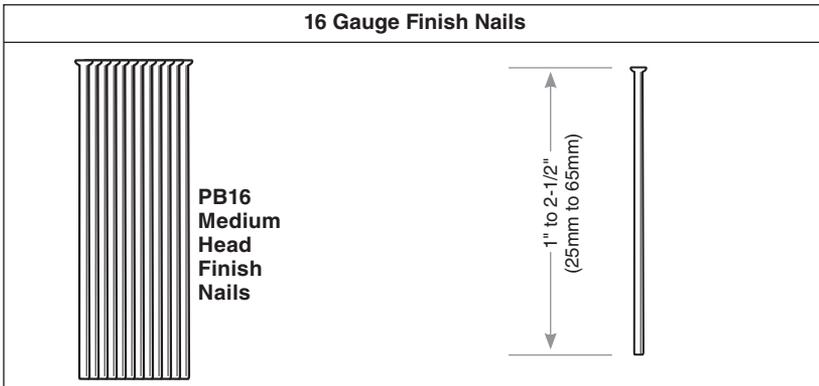


16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Parts Identification

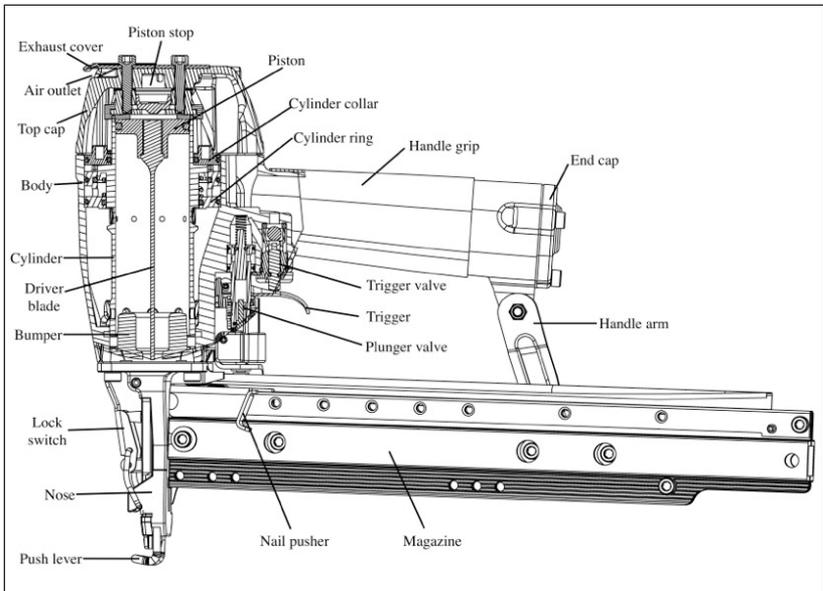

Accessories

STANDARD ACCESSORIES



1	Eye Protection	1
---	----------------	---


Safety Information



Important Safety Instructions for Operating Nailers READ ALL INSTRUCTIONS



1. OPERATORS AND OTHERS IN WORK AREA MUST WEAR SAFETY GLASSES WITH SIDE SHIELDS.



Danger to the eyes exists due to the possibility of flying fasteners and debris when operating the nailer. To guard against these hazards always wear safety glasses with side shields to protect both the front and sides. Make sure others in the work area wear safety glasses, too.

Eye protection equipment must conform to the requirements of American National Standards Institute, ANSI Z87.1.

The employer is responsible to enforce the use of eye protection equipment by the tool operator and other personnel in the work area.

2. EAR AND HEAD PROTECTION MAY BE NEEDED IN SOME ENVIRONMENTS.

Some work areas may include exposure to high noise levels which can lead to hearing damage. Always wear ear protection to protect your ears from loud noise. Wear head protection to protect your head from flying objects.



3. KEEP FACE, HANDS AND FEET AWAY FROM FIRING HEAD AT ALL TIMES.

Never place your face, hands or feet near the firing head.

4. KEEP FINGER AWAY FROM TRIGGER WHEN NOT DRIVING FASTENERS TO AVOID ACCIDENTAL FIRING.

Always carry the nailer by the handle only. Never carry the nailer with your finger on the trigger since you could drive a fastener unintentionally and injure yourself or someone else.

5. NEVER POINT NAILER AT YOURSELF OR OTHERS IN WORK AREA.

Respect the nailer as a working implement. Always assume the nailer contains fasteners and never point the nailer at yourself or others, whether or not it contains fasteners. If fasteners are mistakenly driven, it can lead to severe injuries. Never engage in horseplay with the nailer.

6. DRESS PROPERLY.

Do not wear loose clothing or jewelry as they can be caught in moving parts. Rubber gloves and nonskid footwear are recommended when working outdoors. Wear protective hair covering to contain long hair.

7. KEEP VISITORS AWAY.

All visitors should be kept safely away from work area and should not handle the nailer.

8. KEEP OUT OF REACH OF CHILDREN.

9. DO NOT OVERREACH.

Keep proper footing and balance at all times.

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

10. STAY ALERT.

Watch what you are doing. Use common sense and do not operate the nailer when you are tired. The nailer should never be used if you are under the influence of alcohol, drugs or medication that makes you drowsy.

11. KEEP WORK AREA CLEAN.

Cluttered areas invite injuries. Clear all work areas of unnecessary tools, debris, etc.

12. DO NOT USE THE NAILER AS A HAMMER.

13. NEVER CARRY THE NAILER BY THE HOSE.

14. HANDLE THE NAILER CAREFULLY.

This nailer was designed for driving nails into wood and similar items. Operate the nailer safely and correctly and do not use for purposes other than those specified in this manual.

Because of high air pressure in the nailer, cracks in the surface are dangerous. To avoid tool damage, do not drop the nailer or strike the nailer against hard surfaces and do not scratch or engrave on the nailer. Handle the nailer carefully.

15. BEFORE USING THE NAILER, CHECK TO MAKE SURE PARTS ARE NOT BROKEN OR MISSING AND THAT ALL SCREWS ARE TIGHT. DO NOT OPERATE A TOOL THAT IS OPERATING ABNORMALLY.

If the nailer appears to be operating unusually, is making strange noises, has parts missing or appears to be defective, stop using it immediately and arrange for repairs by an authorized service center.

16. BEFORE STARTING WORK, CHECK THE FASTENING OPERATION SWITCHING DEVICE.

This nailer includes a fastening operation switching device. Check the setting of the operation switching device before starting work. If the switching device is not set properly, the nailer will not operate correctly.

17. CHECK SAFETY/PUSH LEVER BEFORE USE.

Make sure the safety/push lever operates properly. Never use the nailer unless the safety/push lever is operating properly, otherwise the nailer could drive a fastener unexpectedly. Do not tamper with or remove the safety/push lever, otherwise the safety/push lever becomes inoperable.

18. CHOICE OF TRIGGER METHOD IS IMPORTANT.

Read and understand section titled "Methods of Operation."

19. DO NOT USE OXYGEN, COMBUSTIBLE OR OTHER BOTTLED GASES. EXPLOSION MAY OCCUR.

Never use oxygen, combustible gases or any other bottled gases as a power source for the nailer. Use of these gases is dangerous, as the nailer will explode.

Use only clean, dry, regulated compressed air as a power source.

20. DO NOT EXCEED 100 psi.

Do not exceed maximum recommended air pressure 100 psi. Never connect the nailer to pressure which potentially exceeds 120 psi as the nailer can burst.

21. NEVER USE IN PRESENCE OF FLAMMABLE LIQUIDS OR COMBUSTIBLES.

The nailer produces sparks during operation. Never use the nailer on sites containing lacquer, paint, benzine, thinner, gasoline, gases, adhesive agents, or other materials which are combustible or explosive.

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

22. KEEP ALL SCREWS AND COVERS MOUNTED TIGHTLY IN PLACE.

Keep all screws and covers tightly mounted. Check their condition periodically. Never use the nailer if parts are missing or damaged.

23. DO NOT USE THE WRONG FITTING ON NAILER.

The nailer and air hose must have a hose coupler so that all pressure is removed from the nailer when the coupler is disconnected. The connector on the nailer must not hold pressure when the air supply is disconnected. If the wrong fitting is used, the nailer can remain charged with air after disconnecting and thus will be able to drive a nail even after the air line is disconnected, possibly causing injury.

24. DO NOT LOAD FASTENERS WITH TRIGGER PULLED OR SAFETY/PUSH LEVER DEPRESSED.

When loading fasteners into the nailer or when connecting the air hose:

- Do not pull the trigger
- Do not depress the safety/push lever
- Keep the nailer pointed downward

25. CHECK FOR LIVE WIRES.

Avoid the risk of severe electrical shock by checking for live electrical wires that may be hidden by walls, floors or ceilings. Turn off the breaker switch to ensure there are no live wires.

26. HOSES.

Air hoses should be professional grade and have a minimum of 150 psi working pressure. Make sure that the hose is securely fastened. If there is any damage to the hose, replace it before using the nailer.

27. PLACE NAILER PROPERLY ON WORK PIECE.

Do not drive fasteners on top of other fasteners or with the nailer at too steep of an angle. The fasteners can ricochet and hurt someone.

28. BE CAREFUL OF DOUBLE FIRING DUE TO RECOIL.

If the safety/push lever is unintentionally allowed to re-contact the work piece following recoil, an unwanted fastener will be driven.

In order to avoid this undesirable double fire:

- Intermittent operation (trigger firing)
 - 1) Set the switching device to SINGLE ACTUATION MECHANISM.
 - 2) Pull the trigger rapidly and firmly.
- Continuous operation (safety/push lever firing)
 - 1) Do not press the nailer against the wood with excessive force.
 - 2) Separate the nailer from the wood as it recoils after fastening.

29. DO NOT DRIVE FASTENERS CLOSE TO THE EDGE OR CORNER OF THE WORK ESPECIALLY WHEN USING THIN MATERIAL.

The work piece is likely to split and the fastener could fly free and hit someone.

30. NEVER DRIVE FASTENERS FROM BOTH SIDES OF A WALL AT THE SAME TIME.

The fasteners could be driven into and through the wall and hit a person on the opposite side.

31. DO NOT DISCONNECT AIR HOSE FROM NAILER WHILE FINGER IS ON THE TRIGGER.

The nailer can fire when it is re-connected to an air supply.

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

32. DISCONNECT THE AIR SUPPLY AND EMPTY THE MAGAZINE WHEN THE NAILER IS NOT IN USE. NEVER LEAVE A NAILER UNATTENDED WITH THE HOSE ATTACHED.

Always disconnect the air supply from the nailer and empty the magazine when operation has been completed or suspended, when unattended, moving to a different work area, adjusting, disassembling, repairing the nailer, and clearing a jammed fastener.

33. DISCONNECT AIR HOSE FROM NAILER WHEN:

- Doing maintenance and inspection
- Loading fasteners
- Attaching or removing the nose cap
- Clearing a jam
- It is not in use
- Leaving work area
- Moving it to another location
- Handing it to another person

34. MAINTAIN NAILER WITH CARE.

Keep the nailer clean and lubricated for better and safer performance.

35. USE ONLY AUTHORIZED OR RECOMMENDED PARTS, ACCESSORIES OR FASTENERS.

Unauthorized parts, accessories or fasteners may void your warranty and can lead to tool malfunction and resulting injuries. Only authorized service personnel should repair the nailer.

36. NEVER MODIFY OR ALTER A NAILER.

Doing so may cause it to malfunction and personal injuries may result. The warranty is no longer valid when a tool is modified or altered.

37. BE CAREFUL WHEN CLEANING TOOL WITH A BLOW GUN.

Do not touch the trigger, point the air outlet at a person, touch the safety/push lever or set it to pushed up status.

38. STORE NAILER PROPERLY.

When not in use, the nailer should be stored in a dry place. Keep out of reach of children and lock the storage area.

Employer's Responsibilities

- 1.** Ensure that this manual is available to operators and personnel performing maintenance.
- 2.** Ensure that nailers are used only when operators and others in work area are wearing **EYE PROTECTION**.
- 3.** Keep nailer in safe working order.
- 4.** Maintain nailer properly.
- 5.** Ensure that the nailers that require repair are not used before the repair is completed.

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Operating the Nailer

NOTE: The information contained in this Manual is designed to assist you in the safe operation of the nailer. Some illustrations in this Manual may show details or attachments that are different from those on your nailer.


Air Supply, Connections and Operating Pressure

Read section titled **SAFETY**. Make sure of the following before operation:

Air Supply

Power source (Compressor)

- Use only clean, dry, regulated compressed air as a power source for this nailer.
- NEVER use oxygen or other bottled gases, as an explosion may occur.
- Air compressors used to supply compressed air to this nailer must comply with the requirements of the latest version of ANSI Standard B 19.3 Safety Standard for Compressors for Process Industries.
- Moisture or oil in the air compressor may accelerate wear and corrosion in the nailer.
- Drain daily.

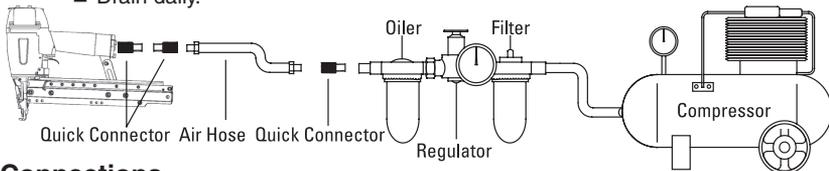

Connections

1. Fittings

Install a female coupler to the hose. The female coupler will connect to the quick release that fits the tool.

2. Filter-Regulator-Lubricator

- NEVER connect tool to pressure which potentially exceeds 120 psi.
- Filter-regulator-lubricator units supply an optimum condition for the nailer and extend the nailer life. These units should always be used.

Filter

- The filter removes moisture and dirt mixed in compressed air.
- Keep the filter clean by maintaining tool regularly.
- Drain daily.

Regulator

- The regulator controls the operating pressure for safe operation of the nailer.
- Inspect the regulator before operation to be sure it operates properly.

Lubricator

- The lubricator supplies an oil mist to the nailer.
- Inspect the lubricator before operation to be sure the supply of lubricant is adequate.
- If an in-line lubricator is not used, a few drops of oil will need to be added to the air inlet before each use.

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

3. AIR HOSE

Air hose must have a minimum working pressure rating of 150 psi or 150% of the maximum pressure produced in the system, whichever is higher.

Operating Pressure

- Recommended operating pressure is 70 to 100 psi / 5 to 7 kgs.
- Select the operating pressure within this range for the best fastener performance. The nail length and thickness and the hardness of the wood are factors in determining what the pressure should be set at.
- Do not exceed this recommended operating pressure.

Lubrication

It is important that the tool be properly lubricated. Without proper lubrication, the tool will not work properly and parts will wear prematurely.

- Use INTERCHANGE pneumatic tool lubricant. Do not use detergent oil or additives. These lubricants will harm the O-rings and other rubber parts. This will cause the tool to malfunction.
- Filter-regulator-lubricator units should always be used. Keep the lubricator filled with INTERCHANGE pneumatic tool lubricant.
- If a lubricator is not available, supply 3 to 5 drops of INTERCHANGE pneumatic tool lubricant into the air plug on the tool twice a day.

NOTE: Dirt and water in the air supply are major causes of wear in the tool. An air filter will help to get the best performance and minimum wear from the tool.

Frequent, but not excessive, lubrication is required for the best performance. Oil added through the air line connection will lubricate the internal parts.



WARNING

NEVER connect nailer to pressure which potentially exceeds 120 psi.

DO NOT USE THE WRONG FITTING ON NAILER.

The nailer and air hose must have a hose coupler so that all pressure is removed from the nailer when the coupler is disconnected. The connector on the tool must not hold pressure when the air supply is disconnected. If the wrong fitting is used, the tool can remain charged with air after disconnecting and thus will be able to drive a nail even after the air line is disconnected, possibly causing injury.



DANGER

NEVER use oxygen or other bottled gases, as an explosion may occur.

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Testing The Nailer

Before using the nailer, test it by using the check list below.


Conduct the test in the following order.

If abnormal tests occur, stop using the nailer and contact an authorized service center immediately.


1. Disconnect air hose from nailer.
Remove all nails from nailer.

ALL SCREWS MUST BE TIGHTENED.

If any screws are loose, tighten them.

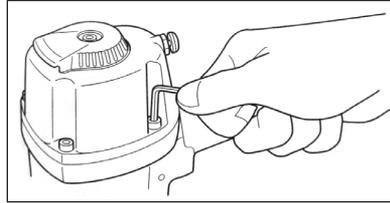


THE SAFETY/PUSH LEVER AND TRIGGER MUST MOVE SMOOTHLY.

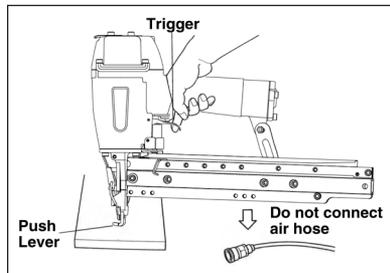

2. Adjust the air pressure to 70 psi.
Connect the air hose.
Do not load any nails in the nailer.


The NF6516 has a dual action trigger. To set the trigger to single fire, set it in the **downward** position (away from the trigger), otherwise it will not operate properly.

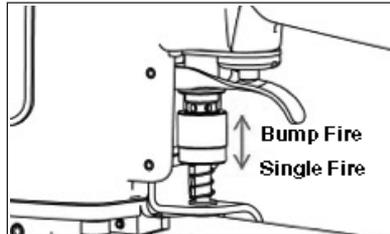

THE NAILER MUST NOT LEAK AIR.

3. Remove the finger from the trigger
and press the safety/push lever
against the wood.

THE NAILER MUST NOT OPERATE.

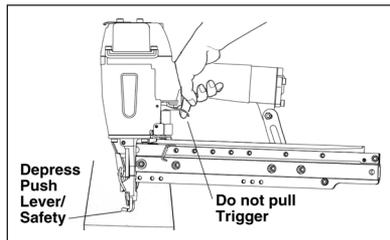

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)


Model No. NF6516

Item No. 65315

- 4.** Separate the safety/push lever from the wood.

Next, point the nailer downward, pull the trigger and then wait in that position for 5 seconds or longer.

THE NAILER MUST NOT OPERATE.

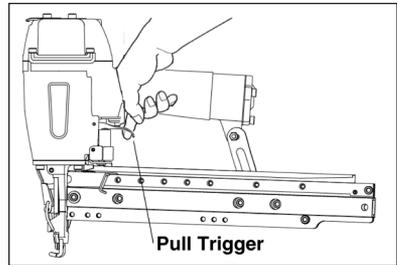

- 5.** Without touching the trigger, depress the safety/push lever against the work piece.

■ Pull the trigger.

THE NAILER MUST OPERATE.

Hold the trigger back while separating the safety/push lever from the wood.

THE NAILER WILL REMAIN OPERATIONAL (the driver blade will remain at the bottom).

Remove the finger from the trigger.


NAILER OPERATION WILL END (the driver blade will return to the top).

- 6.** The NF6516 has a dual action trigger. To set the trigger to bump fire, set it in the **upward** position (toward the trigger), otherwise it will not operate properly.

With the nailer off the work piece, pull the trigger.

Depress the safety/push lever against the work piece.

THE NAILER MUST OPERATE.

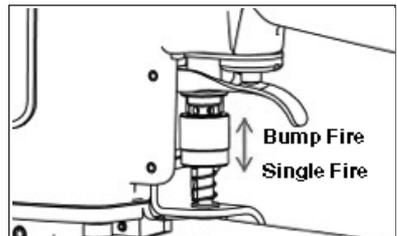

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Operating The Nailer

DANGER: Operators and others in work area must wear safety glasses with side shields. Eye protection equipment must conform to the requirements of American National Standards Institute, ANSI Z87.1.



Read and understand METHODS OF OPERATION below.

This nailer includes a nailing operation switching device. Before starting, make sure to check that the nailing operation switching device is properly set.

Nail Loading / Testing Instructions

1. Disconnect the air hose.
2. Press the release lever to open the nail retaining door and magazine cover.
3. Load the nails in the magazine; insert the first of the nails into the opening of the magazine.
4. Ensure the heads of the nails line up with the retaining slot.
5. Close the magazine cover and lock in place the nail retaining door.
6. Attach the hose to the Quick Connect Coupler on the back of the nailer.
7. Release the safety device on the nailer. (The safety device is fitted on the tool to help to reduce the risk of injury.)
8. Press the safety/push lever against the piece of wood to be nailed; the trigger can now be depressed and the nail can be driven.
9. Set the pressure by firing a few test nails into a piece of scrap wood of the same type to be nailed. Start the pressure low and increase until you get the penetration that is required.

Methods of Operation

Explanation of the two nailing operations (*on some models*)


The NF6516 has a dual action trigger. To set the trigger to single fire, set it in the **downward** position (away from the trigger) or, to set the trigger to bump fire, set it in the **upward** position (toward the trigger).

■ Single Fire

For single fire operation, depress the contact arm against the work surface and pull the trigger. Tool cannot fire a second nail until the trigger is released and tool can cycle.

■ Bump Fire (Multi-Fire)

For bump fire operation, hold the trigger and depress the contact arm against the work surface.

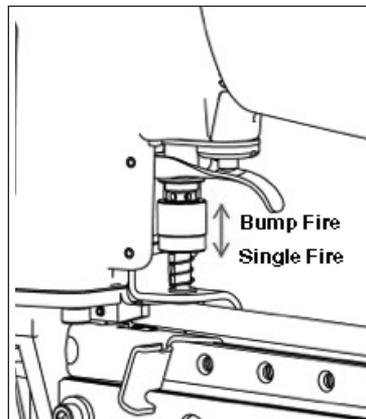

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Troubleshooting

Problem	Cause	Solution
Trigger valve leaks air	O-ring is cut or cracked	Replace o-ring
Nose leaks air	O-ring or gasket is cut or cracked Bumper is cracked or worn	Replace o-ring or gasket Replace bumper
Failure to cycle	Air supply restriction Tool is dry, lack of lubrication Broken cylinder cap spring	Check air supply equipment Apply air tool lubricant Replace cylinder cap spring
Lack of power	Air pressure is too low	Check air supply equipment
Slow to cycle	Broken cylinder cap spring O-ring or seal is cut or cracked Exhaust blocked Tool is dry, lack of lubrication	Replace cylinder cap spring Replace o-ring or seal Check bumper, head valve spring Apply air tool lubricant
Nails jam in tool	Bent nails Broken or chipped driver Wrong size nail	Replace with new nails Replace piston/driver assembly/bumper Replace with correct type of nail

Maintenance and Inspection

Read the section titled **SAFETY**.

NOTE: The information contained in this Manual is designed to assist you in the safe maintenance of the nailer. Some illustrations in this Manual may show details or attachments that are different from those on your nailer.

Storing

- When not in use for an extended period, apply a thin coat of the lubricant to the steel parts to avoid rust.
- The nailer should be stored in a warm and dry place when not in use. Do not store the nailer in a cold weather environment.

Cold Weather Care

- Do not store the tool in a cold weather environment.
Keep the tool in a warm area until beginning the work.
- If the tool is already cold, bring it in a warm area and allow the tool to warm up before use.
 1. Reduce the air pressure to 60 to 80 psi (4.2 bar 4.2 kgf/cm²).
 2. Remove all fasteners from the tool.
 3. Connect the air hose and free-fire (blank-fire) the tool.

The lowered air pressure will be enough to free-fire the tool. Slow speed operation tends to warm up the moving part.

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Maintenance and Inspection

Read the section titled **SAFETY**.

NOTE: The information contained in this Manual is designed to assist you in the safe maintenance of the nailer. Some illustrations in this Manual may show details or attachments that are different from those on your nailer.

WARNING: Disconnect air hose and remove nails from nailer when:

- Doing maintenance and inspection
- Clearing a jam


Inspecting the magazine

1. DISCONNECT AIR HOSE.
2. Clean the magazine. Remove dust which may have accumulated in the magazine
3. Lubricate the nail rail with nailer lubricant.

Clearing a jam

Remove a jammed nail in the following order:

1. DISCONNECT AIR HOSE.
2. Remove all nails.
3. Remove the lock lever and open guide plate (A).
4. Remove the jammed nail with a slotted head screwdriver.
5. Close guide plate (A) and latch.
6. In case of frequent jams, contact an authorized service center.

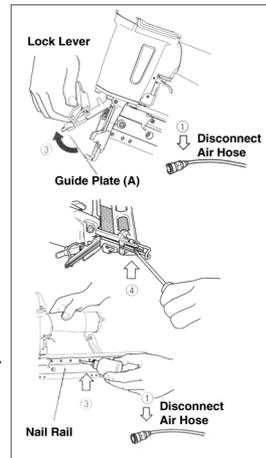

A qualified person should perform repairs and maintenance.

Periodic maintenance to be performed:

- Check that the piston bumper is operating normally. A damaged piston bumper may cause damages to other component parts.
- Check o-rings for wear or damage. Damaged o-rings may affect overall performance.
- Make sure all screws are secure. Loose screws may affect overall performance.
- When repairing a tool, make sure the internal parts are clean and lubricated.

16 Ga. Finish Nailer


Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

Parts Drawing/Schematics, Parts List & Parts Kits

PARTS DRAWING/SCHEMATICS FOR NF6516

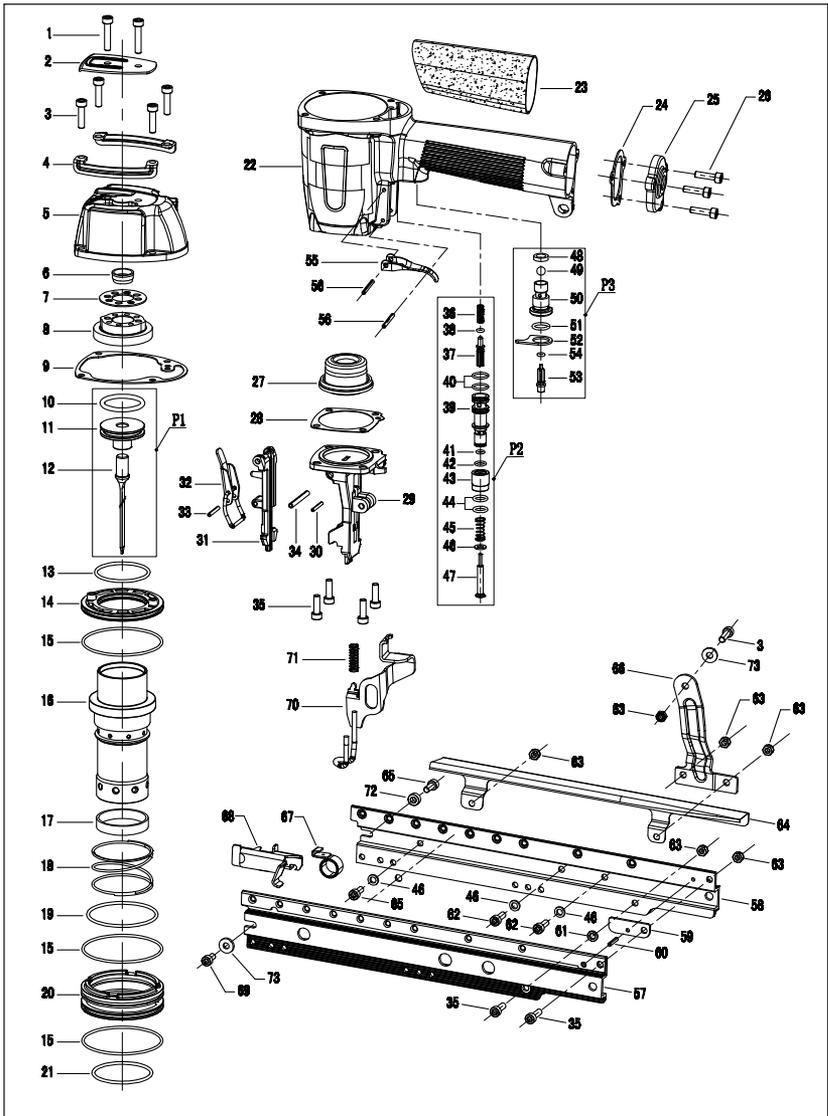

15-03-30

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

PARTS LIST FOR NF6516

NO.	ORDER NO.	DESCRIPTION	NO.	ORDER NO.	DESCRIPTION
1	610120	BOLT M5X25	39	311080	VALVE BUSHING
2	323960	EXHAUST COVER	40	510330	O-RING 11.2X1.5
3	610100	BOLT M5X20	41	510130	O-RING 4.6X1.5
4	323970	SIDE PROTECTOR	42	510230	O-RING 7X1.5
5	110550	CYLINDER CAP	43	311090	VALVE SLEEVE
6	411000	EXHAUST VALVE	44	510270	O-RING 9X1.9
7	520350	EXHAUST SEAL	45	621630	PLUNGER SPRING B
8	311050	PISTON STOP	46	630140	WASHER
9	520360	GASKET	47	324930	PLUNGER B
10	511600	O-RING 31X3.5	48	410090	VALVE RUBBER WASHER
11	311060	PISTON	49	410100	RUBBER BALL
12	324910	DRIVER BLADE	50	310090	TRIGGER VALVE BUSHING
13	511610	O-RING 42.5X2.4	51	510340	O-RING 11.2X2
14	110560	CYLINDER CAP	52	320370	VALVE PLATE
15	511650	O-RING 65X2	53	420310	TRIGGER STEM
16	311070	CYLINDER	54	510060	O-RING 3X1.8
17	410900	CYLINDER SEAL	55	320340	TRIGGER
18	621450	CYLINDER SPRING	56	640190	ROLL PIN 3X32
19	511640	O-RING 56X2.4	57	311100	MAGAZINE A
20	110570	CYLINDER RING	58	311110	MAGAZINE B
21	511630	O-RING 47X2.4	59	324940	PARTITION
22	110580	BODY	60	640110	ROLL PIN 3X16
23	410140	HANDLE GRIP	61	324950	SLEEVE
24	520370	END CAP SEAL	62	610730	BOLT M5X14
25	110590	END CAP	63	610790	NUT M5
26	610090	BOLT M5X18	64	324960	STOP LEVER
27	411010	BUMPER	65	610070	BOLT M5X12
28	520380	NOSE SEAL	66	324970	HANDLE ARM
29	211620	NOSE	67	324980	ROLL SPRING
30	640050	ROLL PIN 2.5X20	68	324990	NAIL FEEDER
31	211630	NOSE COVER	69	610060	BOLT M5X10
32	324920	LOCK SWITCH	70	325000	SAFETY
33	640130	ROLL PIN 3X20	71	621640	SAFETY SPRING
34	640550	ROLL PIN 4X35	72	325010	WASHER
35	610080	BOLT M5X16	73	324070	WASHER
36	620160	PLUNGER SPRING A	P1	D324911	DRIVER UNIT
37	422160	PLUNGER A	P2	T311081	PLUNGER VALVE
38	510050	O-RING 2.8X1.8	P3	T310091	TRIGGER VALVE

16 Ga. Finish Nailer

Drives Finish Nails (1" to 2-1/2" / 25mm to 65mm)

Model No. NF6516

Item No. 65315

PARTS KITS FOR NF6516

ORDER NO.	KIT #	ITEM
98770	Kit #1	O-Ring/Gasket for NF6516
98771	Kit #2	Piston/Driver Assembly for NF6516
98772	Kit #3	Head Cap Assembly for NF6516
98773	Kit #4	Trigger Valve Assembly with Trigger for NF6516
98774	Kit #5	Magazine Assembly for NF6516
98775	Kit #6	Guide Body Assembly for NF6516
98776	Kit #7	Safety Kit for NF6516
98777	Kit #8	Feeder Kit for NF6516
98778	Kit #9	Bumper Kit for NF6516

NOTICE: The parts listed in this manual are for service assembly and for reference. Changes to the tool and drawing may be made without notification.

Most parts or parts kits are available. Contact your local dealer for more information.

WARNING: When the tool needs repairing or servicing, it is strongly recommended that you contact your local dealer. Do not disassemble the tool yourself, which might waive your right for product guarantee.



WARNING!

- Always follow the tool manufacturer's safety and maintenance instructions.
- Always wear safety glasses with side shields when operating or servicing tools.
- Always disconnect the air supply from the tool and empty the magazine when servicing tools.

Limited Five (5) Year Warranty for Pneumatic Nailers

Our products are designed and constructed using the highest standards of both material and workmanship. We warrant to the original retail purchaser that their nailers will be free from defects in material or workmanship for the warranty period of five years.

During the warranty period (which begins on the purchase date), we will repair or replace, at our option and expense, any product or part that is defective in materials or workmanship after examination by an Authorized Warranty Service Center, subject to the exceptions, exclusions and limitations described below. Any replacement product or part will carry a warranty for the balance of the warranty period applicable to the replaced product or part. A DATED SALES RECEIPT OR PROOF OF PURCHASE FROM THE ORIGINAL RETAIL PURCHASER IS REQUIRED TO MAKE A WARRANTY CLAIM. To make a warranty claim, you must return the product, with proper receipt/proof of purchase and return transportation charges prepaid, to us (your dealer) or an Authorized Warranty Service Center. We will perform our obligations under this warranty within a reasonable time after approval of the warranty claim.

WARRANTY EXCLUSIONS

The following warranty exclusions apply:

1. Normal wear parts are not covered under this warranty. Normal wear parts include, for example, rubber o-rings, seals and driver blades.
2. This warranty does not cover parts damaged due to normal wear, misapplication, misuse, accidents, operation at other than recommended speeds, improper storage, or damage resulting during shipping.
3. Products used in production/industrial applications are excluded from this warranty.
4. Labor charges, maintenance, or loss, damage and repairs resulting from improper operation are not covered by this warranty.

GENERAL WARRANTY CONDITIONS

This warranty will be honored, only if:

1. Clean, dry, regulated compressed air has been used at air pressure not exceeding the maximum indicated on the tool casting;
2. No evidence of abuse, abnormal conditions, accident, neglect, misuse or improper modifications or storage of the product exists; and
3. No deviations from following recommended operating instructions, specifications, and maintenance schedules exist. (Read Operator Manual for use, specifications, and maintenance instructions).

This warranty is the only warranty for the product and we disclaim all other warranties. Any implied warranties will be limited in duration to the applicable warranty period specified above. Some states do not allow limitations on how long an implied warranty lasts, so the above limitation may not apply to you. Your remedies are solely and exclusively as stated above. We shall in no event be liable for incidental, consequential, indirect or special damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. In no event, whether as a result of a breach of contract, warranty, tort (including negligence) or otherwise, shall our liability exceed the price of the product that has given rise to the claim or liability. Any liability connected with the use of this product shall terminate upon the expiration of the warranty period specified above. No employee or representative of any distributor or dealer is authorized to make any change or modification to this warranty.

This warranty gives you specific legal rights, and you may also have other rights, which vary from state to state.